


BT
シリーズ

オイルホールホルダ (サイドロック式)

BT[®]-OH-SL[®]D-L

OIL-HOLE ADAPTER (Set Screw Type)

BT series

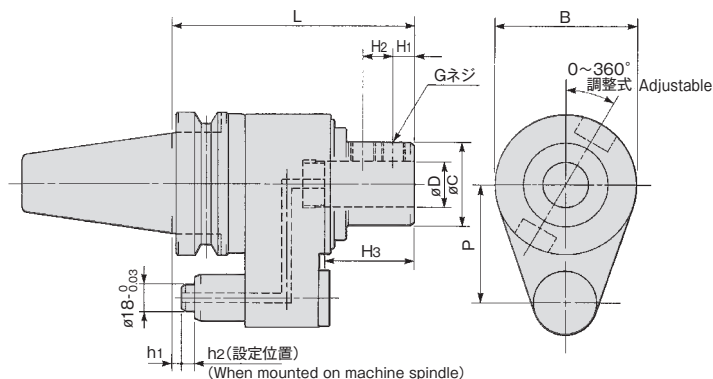

使用条件 CUTTING CONDITIONS		
	標準 (STD)	オーダ (H)
最高回転数 MAX.RPM	1500min ⁻¹	3000min ⁻¹
最高切削油圧 MAX.COOLANT PRESSURE	0.5MPa	2.0MPa

MODEL		CODE	øD	L	øC	H1	H2	H3	G	B	P	
BT40	-OH-SL16-150	11426	16	150	38	25	—	45	M12×1.5	80	65	
	-SL20-150	11428	20				—					
	-SL25-150	11430	25				43					15
	-SL32-165	11432	32	165	53	13	18	60				92
BT50	-OH-SL16-165	13842	16	165	40	25	—	45	M12×1.5	98	80 82 85	
	-SL20-165	13844	20				—					—
	-SL25-165	13846	25				48					15
	-SL32-165	13848	32		58	M16×1.5	60	105				
	-SL40-165	13850	40		63							

注：h1、h2は各メーカー及び機種に依り異なりますので、御注文頂きます際には、メーカー及び機種を御連絡願います。

NOTE: 1. When ordering, please inform h1 and h2 dimensions, which differ depending on machine maker and model.


ご注文例 ORDERING EXAMPLE

①	②	③	④	⑤
BT40	-	OH-SL	16	- 150
① シャンクサイズ	Shank Size			
② 呼称	Name			
③ 刃具シャンク径 øD	Cutter's Shank Dia.			
④ GL長さ L	G.L. Length			

ストレートスリーブ

OH-SL[®]D₁-D₂

STRAIGHT SLEEVE

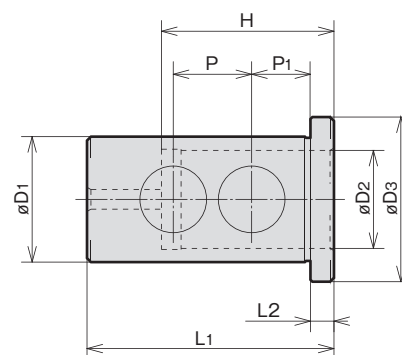

CODE	øD1	øD2	øD3	L1	L2	P	P1	H	N/W (kg)
OH-SL20-16	17712	20	16	30	48	6	—	25	0.07
OH-SL25-16	17716	25	16	35	58	6	20	15	0.19
-20	17718	25	20	—	—	—	—	—	0.15
OH-SL32-16	17722	32	16	42	63	6	20	15	0.35
-20	17724	32	20	—	—	—	—	—	0.32
-25	17726	32	25	—	—	—	—	—	0.22
OH-SL40-16	17732	40	16	50	63	6	20	15	0.57
-20	17734	40	20	—	—	—	—	—	0.54
-25	17736	40	25	—	—	—	—	—	0.45
-32	17738	40	32	—	—	—	—	—	0.30

ご注文例 ORDERING EXAMPLE

①	②	③
OH-SL	20	- 16
① 呼称	Name	
② øD1	øD1	
③ øD2	øD2	