


サイドロックタッパー

SIDE LOCK TAPPER(Set Screw Drive)

AFT02 - ㊦



SLAサイドロックホルダーで御使用下さい。
For endmill holders.

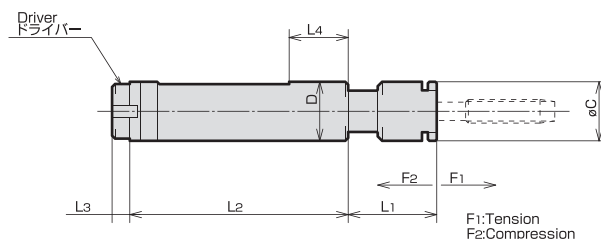

MODEL	CODE	øD	L1	L2	L3		L4	øC	F1	F2	TAP SIZE	COLLET	DRIVER	N/W (kg)
					DR	CL								
AFT02	-20	30342	20	30	74	6	18*	20	14		M3-M12, PT $\frac{1}{8}$	TC19	CL19, DR19	0.18
	-25	30344	25	32	81		23	23	16	10	M4-M14, PT $\frac{1}{8}$ - $\frac{1}{4}$	TC25	CL25, DR25	0.32
	-32	30346	32	34	88	8	33	25	30	18	M5-M20, PT $\frac{1}{8}$ - $\frac{3}{8}$	TC32	CL32, DR32	0.41

注: 1. *M10, M12: 18→26

2. ドライバー駆動(DR)又は、クラッチ駆動(CL)は別売りです。ご注文時にご指定下さい。


NOTE: 2. Both clutch driver and positive driver are available.

ご注文例 ORDERING EXAMPLE

① AFT02 - ② 20


① 呼称 Holder's Name
② øD øD

サイドロックタッパーの構成 COMPONENTS OF TAPPER

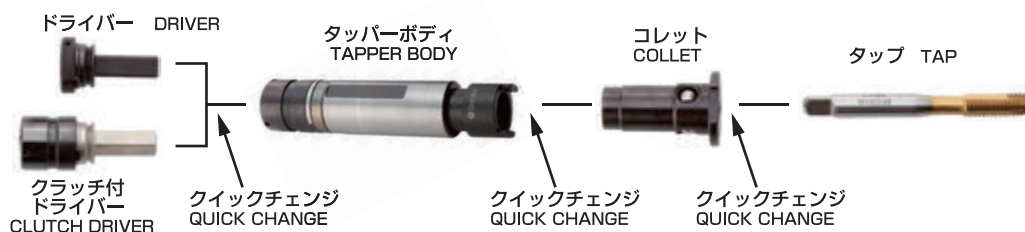

ドライバー

DRIVER (Positive) **DR** ㊦

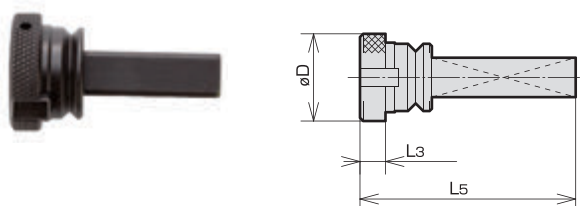

MODEL	CODE	øD	L3	L5	TAPPER タッパー
DR	19	19	6	47	19, 20, 22
	25	25	6	47	25, 26, 28
	32	32	8	55	32, 35, 36


ご注文例 ORDERING EXAMPLE

① ②
DR - 19

① 呼称 Name
② タッパーサイズ Tapper Size

クラッチ付ドライバー

DRIVER (With Torque Clutch) **CL** ㊦ - (タップサイズ) TAP SIZE

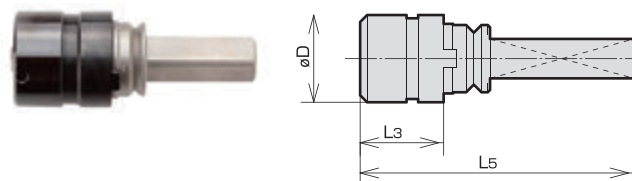

MODEL	CODE	øD	L3	L5	TAPPER タッパー
CL	19	19	18*	59**	19, 20, 22
	25	25	23	64	25, 26, 28
	32	32	33	80	32, 35, 36

注: 1. *M10, M12: 18→26
2. **M10, M12: 59→67

ご注文例 ORDERING EXAMPLE

① ② ③
CL 19 - M4

① 呼称 Name
② タッパーサイズ øD Tapper Size
③ タップサイズ Tap Size

タップコレット

TAP COLLET **TC** ㊦ - (タップサイズ) TAP SIZE

特長


クイック式タップコレット

タップを外せばコレットもワンタッチで着脱できる。

FEATURES

Quick change tapcollet.

Push in the tap collet to unload the tap. Then, tap collet can be removed by hand.

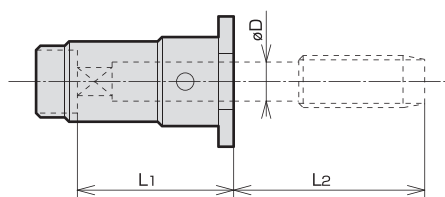

ご注文例 ORDERING EXAMPLE

① ② ③
TC 32 - M6

① 呼称 Name
② タッパーサイズ øD Tapper Size
③ タップサイズ Tap Size

ハンドタップ用 HAND TAP (JIS)

CODE		TAP	øD	TC19		TC25		TC32		TC48			
				L1	L2	L1	L2	L1	L2	L1	L2		
TC19	TC25	M3	4	25	21								
		M3.5			23								
		M4	5		27							25	27
		M4.5			30							25	30
	TC32	M5	5.5	30	30	35	25	35	25				
		M6	6		32		27		27				
		M8	6.2		40		35		35				
		M9	7		42		37		34				
		M10			45		40	37					
		M12			8.5		52	47	44				
		M14			10.5				53	38	50		
		M16	12.5		57				45	50			
M18		14	62	55									
M20		15	67	60									

管用タップ用 PIPE TAP (JIS)

CODE	TAP	øD	TC19		TC25		TC32		TC48	
			L1	L2	L1	L2	L1	L2	L1	L2
TC25	PT $\frac{1}{8}$	8	30	25	32	23	32	23		
	PT $\frac{1}{4}$	11				30		30	32	30
	PT $\frac{3}{8}$	14						33		33